

# Installation and User Instructions

## Horizontal anchor device



## Type **LUX-top®** FSA 2010-H

*Rail system for attaching  
personal fall protection equipment (PFPE)*

**Tested and certified according to DIN EN 795:2012 Type D  
and CEN/TS 16415:2017  
by DEKRA Testing and Certification GmbH**

**With general building authority approval/ General type approval by  
German Institute for Building Technology**

**These assembly and user instructions are supplied with every LUX-top® FSA 2010-H anchor device. They must be read through carefully before use and always be kept accessible, where possible close to the equipment.**

*Preliminary note*

**Before installing the anchor device, the load-bearing capacity of the roof / substructure must be verified. If in doubt, consult with a structural engineer! Comply with the technical building regulations. No changes must be made to the anchor device and only original parts supplied for the anchor system may be used.**

**When using the system in Germany, the information provided in the general building authority approval Z-14.9-808 must be observed.**



## **SAFETY INSTRUCTIONS:**

- When using the anchor device as part of a fall arrest system, for safety reasons it is essential to ensure the necessary clearance below the user at the workplace before each use, so that in case of a fall it is not possible for the user to hit the ground or any other obstacle!
- If a person secured to the **LUX-top<sup>®</sup> FSA 2010-H** anchor device falls, the resulting deformation/deflection of the anchor device (up to 0.5 m at the maximum permissible bracket distance of 3 m (see also p. 5) must be included in the fall arrest distance.

The required minimum clearance below the system user (see also German Statutory Accident Insurance (DGUV) Rule 112-198) is calculated as follows:

- Deformation/deflection of the anchor device (up to 0.5 m)
  - + Tear length of the energy absorber according to its instructions for use (see user instr. of the respective PFPE)
  - + Extension of the lanyard by stretching the rope (see manufacturer's instructions for the relevant PFPE)
  - + Movement of the full body harness on the body (see user instructions of the respective PFPE)
  - + Height of the user
  - + Safety clearance of 1.0 m
- **If there is insufficient clearance below the user, the anchor device may only be used with a restraint system and must be labelled accordingly.** For this purpose, also observe the instructions for use of the other personal fall protection equipment (PFPE).
  - For horizontal use, only lanyards that are suitable for this type of application and which are tested for the load due to the corresponding edge design may be used.
  - The anchor device may only be used by trained and instructed persons, who are familiar with these user instructions and the handling of personal fall protection equipment and are physically and mentally suitable for the task. Health restrictions (e.g. cardiovascular problems, taking medication) can endanger the safety of the system user when working at heights.
  - The misuse of the system, e.g. by suspending loads or transporting materials, is not permitted.

- The anchor device may be used to secure persons against falling by attaching PPE against falls from a height in accordance with EN 363, consisting for example of a full body harness (EN 361), lanyard (EN 354) and energy absorber (EN 355).  
The anchor device can also be used to attach the support system in accordance with TRBS (technical rules for operational safety) 2121-3 for rope access and positioning techniques using an additional slider and shortened bracket spacing (see page 5).
- If the anchor device is used as part of a fall arrest system, the user must be equipped with an energy absorber, which limits the maximum dynamic forces that act on the user during an arrest to 6 kN maximum.
- The use of the anchor device in combination with fall arresters according to EN 360 and guided type fall arresters on a flexible anchorage line (EN 353-2) is possible.
- The combination of individual elements of the above-mentioned equipment with the **LUX-top**<sup>®</sup> **FSA 2010-H** system may increase the potential of fatal hazards by impairing the proper functioning of one of the elements. It is therefore imperative to ensure that the equipment parts assembled into a system are compatible with each other.
- The components of the personal protective equipment against falls from a height must be checked to ensure that they are in a proper condition and that they match these user instructions.
- For anchoring to the **LUX-top**<sup>®</sup> **FSA 2010-H** system, use the system's own sliders (see **LUX-top**<sup>®</sup> **FSA 2010-H** system components on p. 11 f).
- The user must visually inspect the integrity of the anchor device before each use to ensure its proper functional and maintenance condition.
- Should there be any doubts regarding the reliable condition (such as heavy corrosion, deformations, lightning strikes, damaged system components, loose parts, poor condition of the fastening surface) or **after a fall, withdraw the LUX-top**<sup>®</sup> **FSA 2010-H system from further use** and have it inspected by a qualified expert (with written documentation).
- The solidity of the fastening surface after the fall of a person secured to **the LUX-top**<sup>®</sup> **FSA 2010-H** must be checked on site by a qualified person before reinstalling a new anchor device. If necessary, replace the complete rail system including the anchoring system or individual components.
- The access to the safety system (e.g. roof hatch) should be equipped with on-site operating instructions containing information on the location and use of the anchor devices!

- Observe the relevant national regulations and the accident prevention regulations and rules of the employers' liability insurance association when using the **LUX-top**<sup>®</sup> **FSA 2010-H** system. For Germany these include amongst others:
  - **TRBS 2121** "Technical rules for health and safety at work - Danger to individuals through falling"
  - **DIN 4426** "Safety requirements for workplaces and accesses"
  - **DIN 363** "Personal fall protection equipment - Personal fall protection systems"
  - **DGUV Regulation 38** "Construction Work"
  - **DGUV Regulation 112-198** "Use of personal fall protection equipment"
  - **DGUV Information 201-054** "Roof, carpentry and timber construction work"
  - **DGUVI 201-056** "Basic planning guidelines for anchor devices on roofs"
  - **DGUV Information 212-001** "Work using rope-assisted access and positioning techniques"
  - **ASR A2.1** "Technical rules for workplaces - Protection against falls and falling objects, entering hazardous areas"

Furthermore, the "Safety and Work Guideline for Rope Access and Positioning Techniques" issued by the Fach- und Interessenverband für seilunterstützte Arbeitstechniken e.V. (FISAT) [Professional and Interest Group for Rope-Assisted Work Techniques] should be observed.

- Make sure to take up a safe stance whilst using the anchor device!
- There must be a rescue plan covering rescue measures for all possible emergencies so that any necessary rescue can be carried out quickly and safely.
- The lanyard must always be set as short as possible, even when using fall arrest systems, to minimise the potential free fall height in case of a fall. For safety purposes, it is essential to select the position of the anchor device and the way work is carried out so that the potential free-fall and fall height are limited to a minimum. **Ideally, a fall over the edge should be completely prevented by appropriate use of the PFPE.**
- Position the anchor device on the building so that the maximum possible fall factor is 1 in the case of a fall over the edge of the roof.
- Please note that if these user instructions are not observed, and if the documentation is not complete, any recourse claims are excluded.
- Contact the manufacturer if anything is not clear during installation or use of the system!

**Max. number of users\*):**

Fall arrest and restraint system with PFPE	Rope access and positioning techniques pursuant to TRBS 2121-3 (SZP)
<ul style="list-style-type: none"> <li>• <b>4 persons</b> (on the straight complete system) <b>or</b></li> <li>• <b>3 persons</b> (on the complete system with curves) <b>or</b></li> <li>• <b>2 persons</b> (per field for all systems)</li> </ul>	<ul style="list-style-type: none"> <li>• <b>1 person</b> (per field) with a slider for the support system and a separate slider for the safety system <i>A 2<sup>nd</sup> person may be permitted in the field for rescue purposes! Additional sliders may be required for rescue operations!</i></li> <li>• <b>3 persons</b> (on the complete system)</li> </ul>
<p><b>If you have any questions, please contact the manufacturer.</b></p>	

**Possible spacing between the rail brackets\*):**

RAIL BRACKET	SPACING
LUX-top <sup>®</sup> FSA 2010-H bracket, double standing seam	<p><b>Maximum 2 m</b> (in a fall arrest system or restraint system)</p> <p><b>Maximum 1 m</b> (when used for rope access and positioning techniques (SZP) as part of the load-bearing system in accordance with TRBS 2121-3)</p>
<p>LUX-top<sup>®</sup> FSA 2010-H bracket, C-shape</p> <p>LUX-top<sup>®</sup> FSA 2010-H bracket L-80</p> <p>LUX-top<sup>®</sup> FSA 2010-H bracket L-150</p> <p>LUX-top<sup>®</sup> FSA 2010-H bracket, trapezoidal profile</p> <p>LUX-top<sup>®</sup> FSA 2010-H bracket Omega</p> <p>LUX-top<sup>®</sup> FSA 2010-H bracket L-80 WDVS</p>	<p><b>Maximum 3 m</b> (in a fall arrest system or restraint system)</p> <p><b>Maximum 1 m</b> (when used for rope access and positioning techniques (SZP) as part of the load-bearing system in accordance with TRBS 2121-3)</p>
<p>LUX-top<sup>®</sup> FSA 2010-H bracket C-shape ASP</p> <p>LUX-top<sup>®</sup> FSA 2010-H bracket L-shape ASP</p>	<p><b>Maximum 3 m</b> (in a fall arrest system or restraint system)</p> <p>The suitability for rope access and positioning techniques (SZP) as part of the load-bearing system in accordance with TRBS 2121-3 must be examined on a case-by-case basis. Please consult the manufacturer.</p>
LUX-top <sup>®</sup> FSA 2010-H bracket SD (Z II, B, S)	<b>Maximum 1.80 m **)</b> (in a fall arrest system or restraint system)

**Notes**

- **With bracket spacings of less than  $\leq 2$  m, a maximum rail length of 40 m is recommended. Please contact the manufacturer about exceptions. Depending on the bracket spacing, smaller single rail lengths + additional butt connectors may be required!**
- **For special brackets that are not listed here, please observe the respective specifications in the relevant planning.**

\*) When using the system in Germany, observe the information provided in the general building authority approval/ general type approval Z-14.9-808.

\*\*) The maximum bracket spacing can be increased to up to 2 metres in exceptional cases after consultation with the manufacturer.

### Important installation instructions\*):

- The **LUX-top**<sup>®</sup> **FSA 2010-H** system may generally only be installed by qualified installation personnel using the fastening material supplied by the manufacturer in accordance with the installation and user instructions! The installation must be adequately inspected!
- Inspect all components for completeness and integrity before installation. Secure all entry and exit points as well as interruptions in the rail with end stops (e.g. hinged end piece or U-shaped end piece).
- Apply all specified tightening torques using a tested torque wrench.
- The rail system must be integrated into the lightning protection system (potential equalization) according to the national lightning protection regulations. Use as an air-termination system is not permitted! We recommend you always involve the responsible lightning protection engineer/planner!
- Maximum permissible incline of the rail system = 15° (according to EN 795:2012 Type D).
- The installation process requires a sufficiently load-bearing substrate in accordance with the manufacturer's specifications and, if necessary, on-site structural verification in accordance with the technical building regulations. Comply with the minimum component dimensions and edge distances according to the installation instructions!
- The load transfer into the substrate or into the overall construction on site must be verified on site in accordance with technical building regulations.
- The installers must ensure that the substrate is suitable for fitting the anchor device.
- All connections on the anchor device must be properly and conscientiously installed and checked according to the manufacturer's specifications. This must be confirmed by the responsible fitter on the installation documentation form attached to these user instructions.
- Complete the installation documentation form fully after installation and hand it over to the building operator/owner and, if necessary, store it in a secure location together with the parts of the equipment that are not permanently installed.
- We recommend documenting the professional installation additionally using photos and other important installation data. We recommend that you use the documents at the end of these user instructions.  
Further information about the installation documents can be found in EN 795:2012 (Appendix A).

\*) When using the system in Germany, the information provided in the general building authority approval Z-14.9-808 must be observed.

- The installation documents provide the user with evidence that the installation has been carried out properly and provide the basis for subsequent checks on the anchor device. A copy should therefore be kept in the building.
- During installation of the anchor device, comply with the relevant national regulations and the accident prevention regulations of the respective country.
- The installers must take measures to ensure that neither components of the anchor device nor tools can drop from the work site.
- In case of inclined surfaces and roofs, install snow guards to prevent snow loads on the **LUX-top<sup>®</sup> FSA 2010-H** system!

### Installation distances:

Select the distances to the edge according to national provisions and depending on the roof geometry.

Anchor devices that are permanently provided on the roof area should be correctly selected and arranged depending on the type and use of the anchor device taking the particular features of the roof area into account.

Please find information about the recommended execution and positioning of anchor points on the roof e.g. in DGUVI 201-056 "Planning principles for anchor devices on roofs", which was coordinated within the framework of the international group of experts, D-A-CH-S.

The brochure is provided for free download at [www.lux-top-absturzsicherungen.de](http://www.lux-top-absturzsicherungen.de).

National provisions remain unaffected by these recommendations. If these proposals deviate from national law, the user assumes full legal risk to the extent of the deviation.

### Application / system description:

The **LUX-top**<sup>®</sup> **FSA 2010-H** system is an anchor device with a fixed guide according to EN 795:2012 Type D + CEN/TS 16415:2017, which is used to attach personal fall protection equipment for work in areas where there is a risk of falling. The purpose of the anchor device is to prevent persons from falling or to catch them and protect them from serious or even fatal injuries. It is also suitable for use as part of the support system for rope access and positioning techniques (SZP) in accordance with TRBS 2121-3.

The rigid system can be installed in combination with the previously mentioned **LUX-top**<sup>®</sup> **FSA 2010-H** rail brackets on all components with sufficient load bearing capacity.

**LUX-top**<sup>®</sup> **FSA 2010-H** is designed for loading in all directions.

**LUX-top**<sup>®</sup> **FSA 2010-H** can be installed and used in the following configurations:\*)

- Horizontally arranged, e.g. on roofs
- In inclined arrangement, e.g. on inclined surfaces
- In a horizontal configuration, e.g. on walls and posts
- Overhead configuration e.g. on ceilings and beams

The maximum design load - depending on the maximum number of authorised users - which is introduced into the structure at the rail brackets in the case of a fall when used as prescribed is

**For 1 user:  $F_{E,d} = 9.0 \text{ kN}$**  (6 kN x 1.5).

**For 2 users:  $F_{E,d} = 10.5 \text{ kN}$**  (7 kN x 1.5).

**For 3 users:  $F_{E,d} = 12.0 \text{ kN}$**  (8 kN x 1.5).

**For 4 users:  $F_{E,d} = 13.5 \text{ kN}$**  (9 kN x 1.5).

The anchor device **LUX-top**<sup>®</sup> **FSA 2010-H** is approved for the simultaneous use of up to **4 persons**\*) with full body harnesses and energy absorbers (including any necessary persons for first aid/rescue). Each user must be secured to a separate slider!

Even a system that has already been deformed by a fall can generally still be used to rescue people after a fall.

**LUX-top**<sup>®</sup> **FSA 2010-H** can be used in the following fall protection systems according to EN 363:2008:

- Restraint systems
- Fall arrest systems
- Rescue systems

**The respective user instructions of the other personal fall protection equipment and abseiling and rescue equipment used must also be observed!**

**LUX-top**<sup>®</sup> **FSA 2010-H** may also be used as a support system anchor device for rope access and positioning techniques (SZP) according to TRBS 2121-3 (abseiling, etc.) or for positioning people! The maximum permissible load on the system is 3 kN (~300 kg) per user and field.

\*) When using the system in Germany, the information provided in the general building authority approval Z-14.9-808 must be observed.

### Materials:

The rail systems are made from the following materials: 1.4301, 1.4305, 1.4307, AW-2017, W2.0966 and EN AW-6060 T66 (natural anodised). This means the rail systems comply with corrosion resistance class CRC II as per EN 1993-1-4.

### Maintenance, care and testing:

Before each use, the user must ensure that the system is intact (see safety instructions).

The client/operator is obliged to ensure that the anchor device is always in a flawless and proper condition. We therefore recommend having the anchor device inspected by an expert trained or certified by ST QUADRAT Fall Protection S.A. as required, but at least every 12 months (e.g. as part of general roof maintenance).<sup>\*\*)</sup>

This regular inspection/monitoring is essential, as the safety of the user depends on the effectiveness and durability of the anchor device.

Please refer to the checklist in the appendix for assistance with the inspections.

The system must not be subjected to any test loads for the purpose of inspection!

An inspection log card provided in the appendix to these user instructions, on which the expert can document the inspection.

The date of the next inspection should be entered on the LUX-top<sup>®</sup> FSA 2010-H system information plate and on the inspection log card.

Prevent contact between the stainless steel anchor device and "black" steel (including grinding dust), as well as chemicals and other aggressive substances since this can lead to corrosion.

The anchor device **LUX-top<sup>®</sup> FSA 2010-H** is permanently weatherproof.

Depending on the conditions of use, the anchor device must be cleaned occasionally with warm water.

**Under no circumstances use aggressive cleaning agents or chemicals!**

### Miscellaneous:


Modifications or additions may not be implemented without the prior written consent of the manufacturer. Equally, all repairs may only be carried out in agreement with the manufacturer.

If sold on to another country, the reseller must make the instructions for use, maintenance, regular checks and repairs available in the relevant country's language to ensure the safety of the user.

<sup>\*\*)</sup> **Note:** According to the German statutory accident insurance regulation DGUV 112-198, before using anchor devices that are permanently installed on a structural system, check that the last expert inspection was completed no more than one year ago, unless shorter periods are specified due to the conditions of use.

**Standard - system components LUX-top® FSA 2010-H:**

1




LUX-top® FSA 2010-H  
Rail profile

2




LUX-top® FSA 2010-H  
Curved rail

3

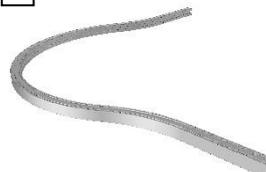

LUX-top® FSA 2010-H  
Curved rail OMEGA


4



LUX-top® FSA 2010-H  
Butt connector LA


*optional exterior butt connector*

5




LUX-top® FSA 2010-H  
U-shaped endpiece

6

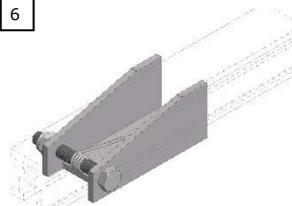


LUX-top® FSA 2010-H  
Hinged outside anchor

7




LUX-top® FSA 2010-H  
Bracket L-80

8




LUX-top® FSA 2010-H  
Bracket L-150

9




LUX-top® FSA 2010-H  
C-shaped bracket

10




LUX-top® FSA 2010-H  
Bracket L-80 WDVS

11




LUX-top® FSA 2010-H  
OMEGA bracket

12

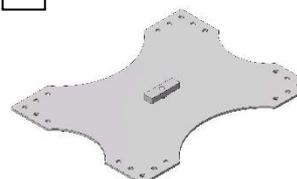


LUX-top® FSA 2010-H  
Bracket trapezoidal profile

13



LUX-top® FSA 2010-H  
Bracket double standing seam

14

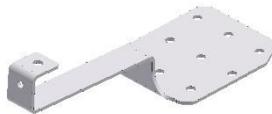


LUX-top® FSA 2010-H  
Bracket SD-Z II

15



LUX-top® FSA 2010-H  
Bracket SD-B

16




LUX-top® FSA 2010-H  
Bracket SD-S

17



LUX-top® FSA 2010-H  
Rectangular lock nut

18




LUX-top® FSA 2010-H  
Slider HSL 45

19



LUX-top® FSA 2010-H  
Slider HSL 90

20

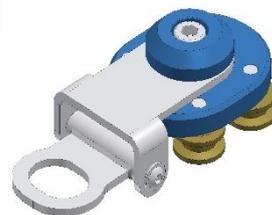

LUX-top® FSA 2010-H  
Slider HSL overhead

21




LUX-top® FSA 2010-H  
Information Sign A2

- (1) **LUX-top® FSA 2010-H rail profile**  
31 x 31 mm; EN AW-6060 T66, anodised natural  
As a permanently installed horizontal rigid guide rail  
in LUX-top® FSA 2010 rail systems.
- (2) **LUX-top® FSA 2010-H rail curve**  
Available in different versions with a minimum radius of 400 mm.  
The rail profile can be flexed in different axes.
- (3) **LUX-top® FSA 2010-H rail curve OMEGA**  
For bypassing external building corners.  
The rail profile can be flexed in different axes.
- (4) **LUX-top® FSA 2010-H butt connector LA**  
For connecting horizontal rails in LUX-top® FSA 2010-H  
rail systems.
- (5) **LUX-top® FSA 2010-H endpiece, U-shape**  
As a fixed end stop in LUX-top® FSA 2010 rail systems.

- (6) LUX-top<sup>®</sup> FSA 2010-H hinged outside anchor**  
Pre- fitted, detachable end stop on the rail to remove the slider.
- (7) LUX-top<sup>®</sup> FSA 2010 -H bracket L-80**  
For fastening the rail system to concrete or steel substructures with 1x M12 concrete anchor or 1x M12 hexagonal bolt.
- (8) LUX-top<sup>®</sup> FSA 2010-H bracket L-150**  
For fastening the rail system to concrete or steel substructures with 1x M12 concrete anchor or 1x M12 hexagonal bolt.
- (9) LUX-top<sup>®</sup> FSA 2010-H bracket, C-shape**  
For fastening the rail system to concrete or steel substructures with 1x M12 concrete anchor or 1x M12 hexagonal bolt.
- (10) LUX-top<sup>®</sup> FSA 2010-H bracket L-80 WDVS**  
For fastening the rail system to concrete or steel substructures with 2x M12 concrete anchors or 2x M12 hexagonal bolts.
- (11) LUX-top<sup>®</sup> FSA 2010-H bracket OMEGA**  
For fastening the rail system to concrete or steel substructures with 2x M12 concrete anchors or 2x M12 hexagonal bolts.
- (12) LUX-top<sup>®</sup> FSA 2010-H bracket, trapezoidal profile**  
For fastening the rail system to trapezoidal profiles in the negative position or sandwich roof elements with 12 special rivets. \*\*\*)
- (13) LUX-top<sup>®</sup> FSA 2010-H bracket, double standing seam**  
For fastening the rail system to double standing seam roofs with aluminium clamping jaws.
- (14) LUX-top<sup>®</sup> FSA 2010-H bracket, pitched roof (SD-Z II)**  
For fastening the rail system to tiled roofs.
- (15) LUX-top<sup>®</sup> FSA 2010-H bracket, pitched roof (SD-B)**  
For fastening the rail system to plain tiled roofs.
- (16) LUX-top<sup>®</sup> FSA 2010-H bracket, pitched roof (SD-S)**  
For fastening the rail system to slate roofs.
- (17) LUX-top<sup>®</sup> FSA 2010-H rectangular lock nut**  
For fastening the rail brackets to the rail profile.
- (18) LUX-top<sup>®</sup> FSA 2010-H slider HSL 45**  
Sliding anchor point that can move freely on the horizontal rigid guide rail.
- (19) LUX-top<sup>®</sup> FSA 2010-H slider HSL 90**  
Sliding anchor point that can move freely on the horizontal rigid guide rail.
- (20) LUX-top<sup>®</sup> FSA 2010-H slider HSL, overhead**  
Sliding anchor point that can move freely on the horizontal rigid guide rail. This slider is specially designed for overhead use in combination with a fall arrester.
- (21) LUX-top<sup>®</sup> FSA 2010-H Information sign A2**  
Contains important information on how to use the system.

\*\*\*) **Note:** Special tool required!

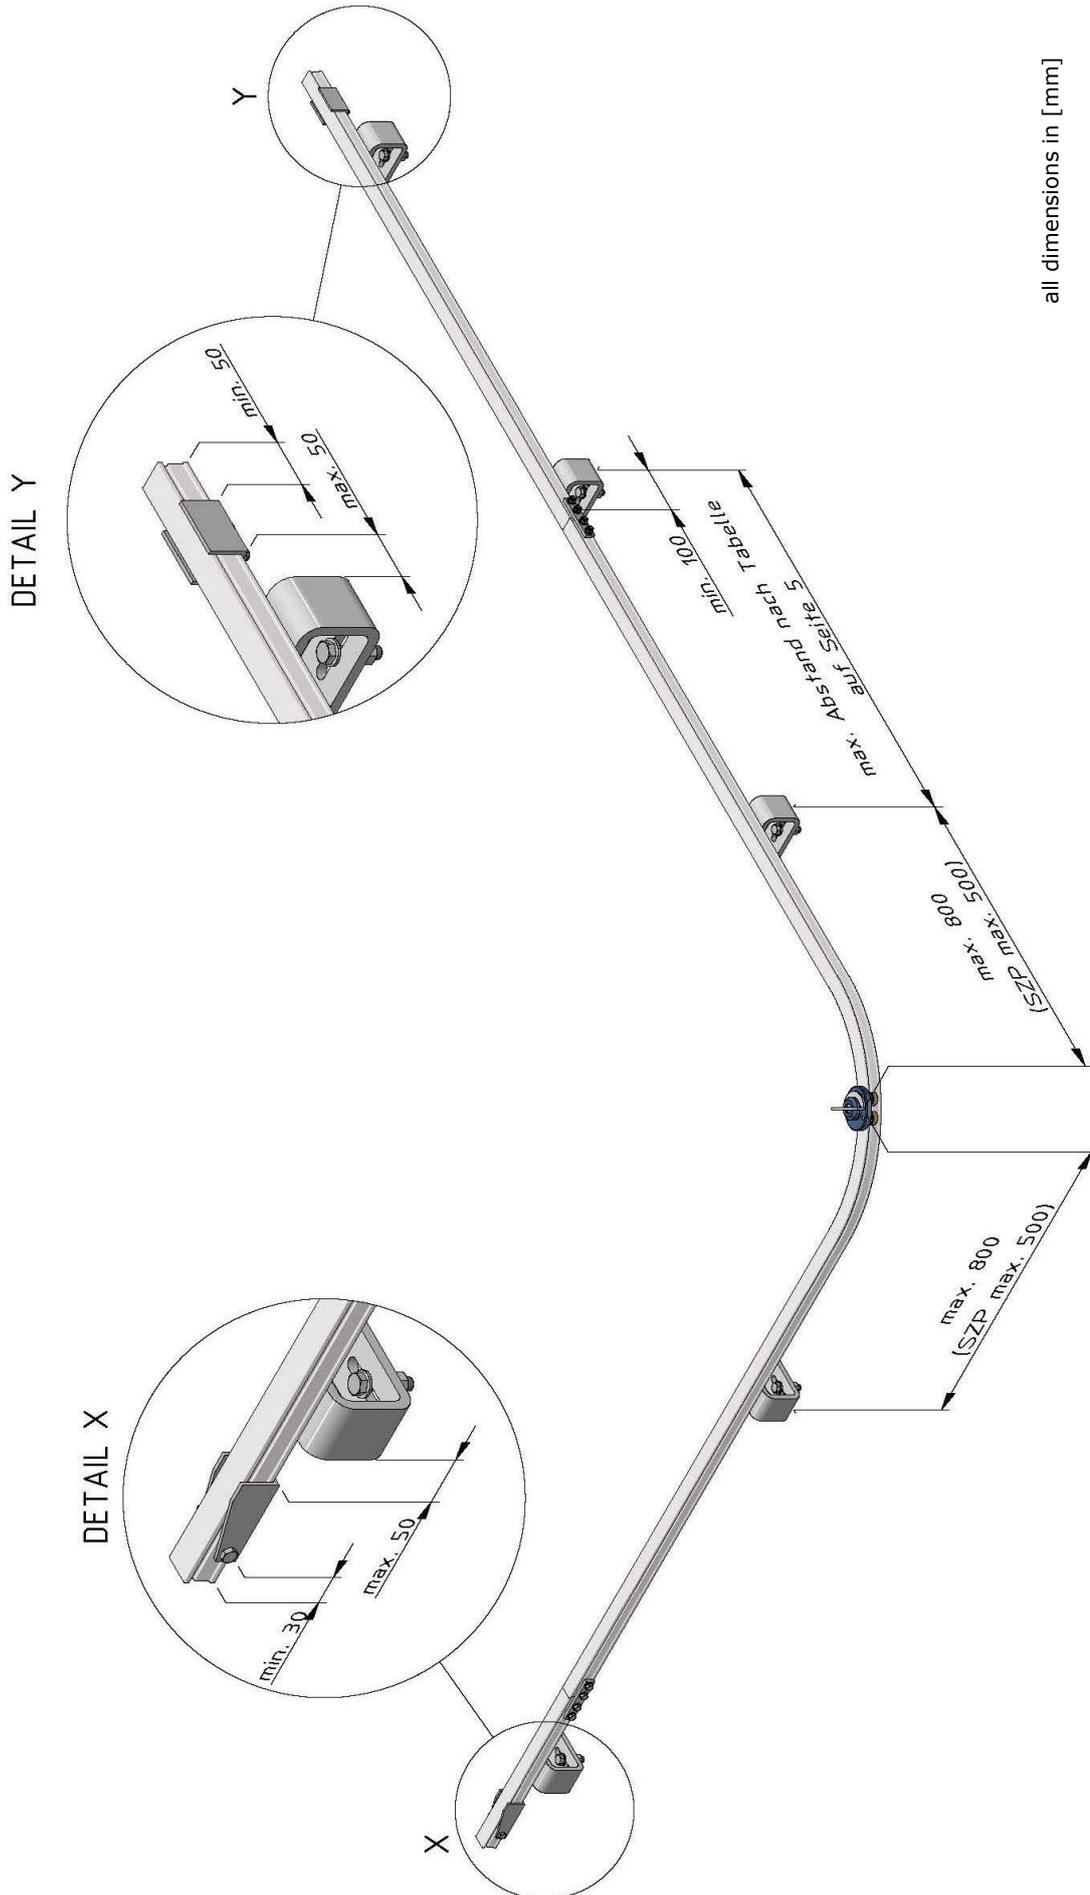

Each rail section / curve must be attached to at least 1 bracket! As a rule, each rail system comprises at least 3 brackets!  
This illustration applies to all bracket types.  
Please consult the manufacturer if you have any questions!

## Installation instructions LUX-top<sup>®</sup> FSA 2010-H:

### **Preliminary note:**

Before installing the anchor device, check the load-bearing capacity of the substructure. Comply with the technical building regulations. Only original parts belonging to the system may be used. **When using the system in Germany, the information provided in the general building authority approval Z-14.9-808 must be observed!**

### **1 Measure and inspect the rail alignment on the object**

### **2 Partition and fit the rail brackets**

#### **2a Bracket L-80, L-150 and C-shape ( made of 10 mm metal sheet)**


***Installation on concrete structural elements min. C20/25:***



Anchor bolt	FAZ II 12/20 A4
Drill hole Ø mm	12
Min. drill hole depth / anchoring depth in concrete [mm]	90 / 70
Tightening torque [Nm]	60
Minimum structural element thickness [mm]	120
Minimum edge distance anchor bolts [mm]	250

1. Position the rail bracket at the desired location.
2. Use a 12 mm Ø drill bit to drill a 90 mm deep hole from the top edge of the concrete.
3. Clean the drill hole thoroughly (brush and blow out).
4. Drive in the supplied concrete anchor and fasten the rail bracket with the correct torque. Use a torque wrench.

**Installation on steel structural elements min. S235:**

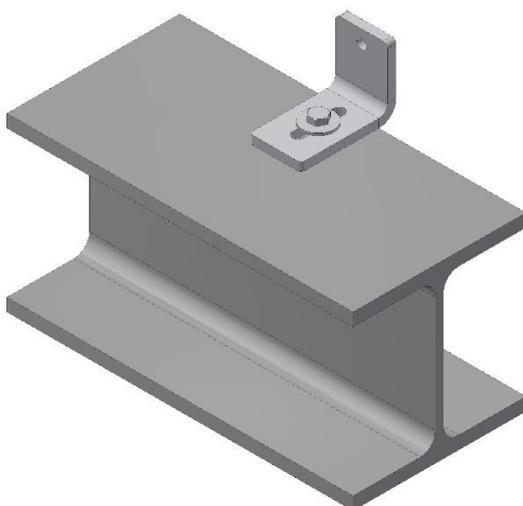

Fasteners	Hexagonal bolt M12 – A2-70
Drill hole Ø mm	13
Tightening torque [Nm]	56 (bolt clean and free of grease)
Minimum structural element thickness [mm]	N.T.B. At least 4
Minimum edge distance [mm]	N.T.B.

**N.T.B. = According to technical building regulations.**

1. Position the rail bracket at the desired location.
2. Mark and drill the hole. Apply corrosion protection if required.
3. Fit the bolt, washer and nut and apply the appropriate torque. Use threadlocker, depending on the ambient conditions!

**2b Bracket L-80 WDVS or bracket Omega (made of 6 mm sheet metal)**


**Installation on concrete structural elements min. C20/25:**



Anchor bolt	FAZ II 12/20 A4
Drill hole Ø mm	12
Min. drill hole depth / anchoring depth in concrete [mm]	90 / 70
Tightening torque [Nm]	60
Minimum structural element thickness [mm]	120
Minimum edge distance anchor bolts [mm]	250

1. Position the rail bracket at the desired location.
2. Use a 12 mm Ø drill bit to drill 90 mm deep holes from the top edge of the concrete.
3. Clean the drill holes thoroughly (brush and blow out).
4. Drive in the supplied concrete anchors and fasten the rail bracket with the correct torque. Use a torque wrench.

**Installation on steel structural elements min. S235:**

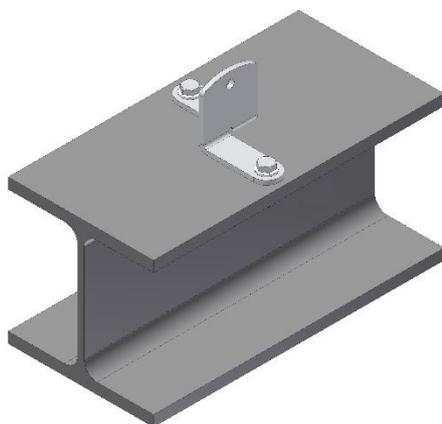

Fasteners	Hexagonal bolts M12 – A2-70
Drill hole Ø mm	13
Tightening torque [Nm]	56 (bolt clean and free of grease)
Minimum structural element thickness [mm]	N.T.B. At least 4
Minimum edge distance [mm]	N.T.B.


**N.T.B. = According to technical building regulations.**

1. Position the rail bracket at the desired location.
2. Mark and drill the holes. Apply corrosion protection if required.
3. Fit the bolts, washers and nuts and apply the appropriate torque. Use threadlocker, depending on the ambient conditions!

**2c Bracket trapezoidal profile**

**Installation on trapezoidal profiles in the negative position or sandwich roof elements made of sheet steel ( $t_{min} = 0.5 \text{ mm}$ ) or sheet aluminium ( $t_{min} = 0.7 \text{ mm}$ )**

Note: The standard trapezoidal profile bracket is designed for an top flange spacing of 250 and 333 mm. More widths on request


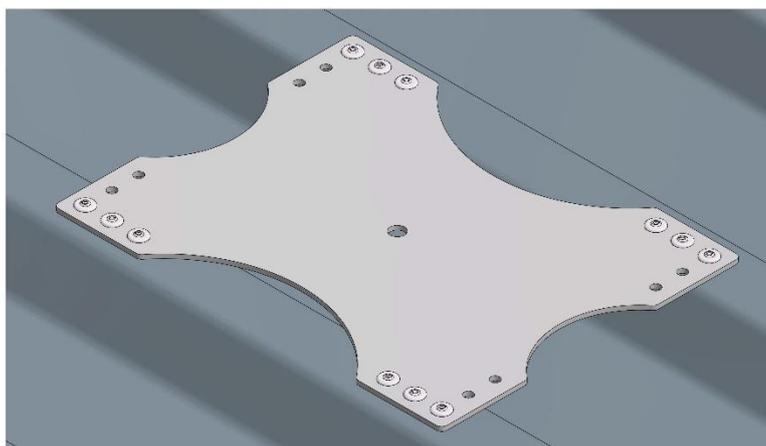


1. Stick the provided sealing strips above the corresponding hole pattern on the underside of the base plate.
2. Place the base plate in the centre of the top flanges of the sandwich roof element or trapezoidal profile.
3. Use the base plate as a drilling template for the rivet fastening holes (Ø 8 mm).  
Hint: First finish placing 2 rivets, then drill the remaining holes!  
**After drilling the holes, remove the drill cuttings from the roof!**
4. Set the supplied rivets (12 units) using special manual riveting pliers (e.g. GESIPA HN2 BT) or an electro-mechanical blind riveter (e.g. GESIPA PowerBird).
5. Ensure that the bracket is properly fixed.


## 2d Bracket double standing seam

### Minimum thickness of the standing seam profiles \*):

- Titanium zinc:	0.70 mm
- Copper:	0.60 mm (only with additional separating layer!)
- Stainless steel:	0.50 mm
- Galvanized steel plate:	0.60 mm
- Aluminium:	0.70 mm

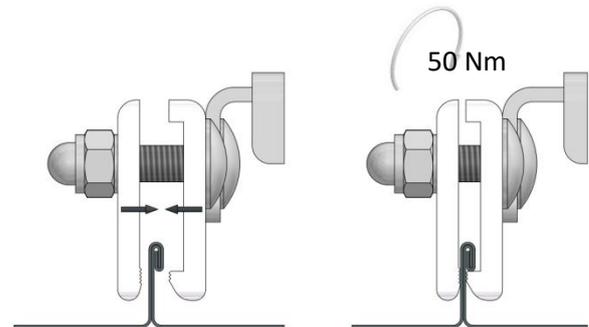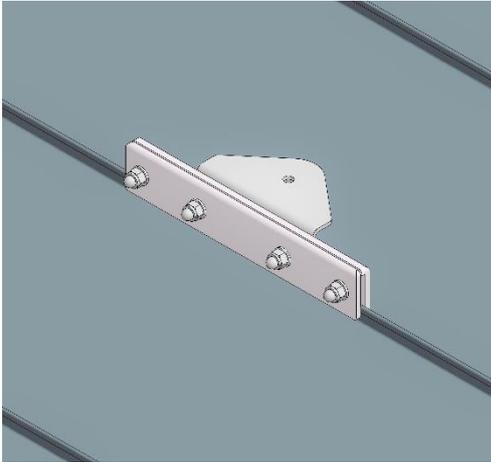

1. Position the rail bracket at the desired location and place it on the seams of the double standing seam sheet from above in such a way that the rear grip of the seam clamping rail engages under the flanging as shown above.
2. Align all rail brackets (e.g. using a guide line).
3. Pull the aluminium seam clamping rail under the flanging with perfect contact and tighten the fastening bolts with a torque of 50 Nm. Ensure that the seam clamping rail is evenly fitted. The square of the carriage bolts must be correctly seated in the punched holes of the clamping rail.

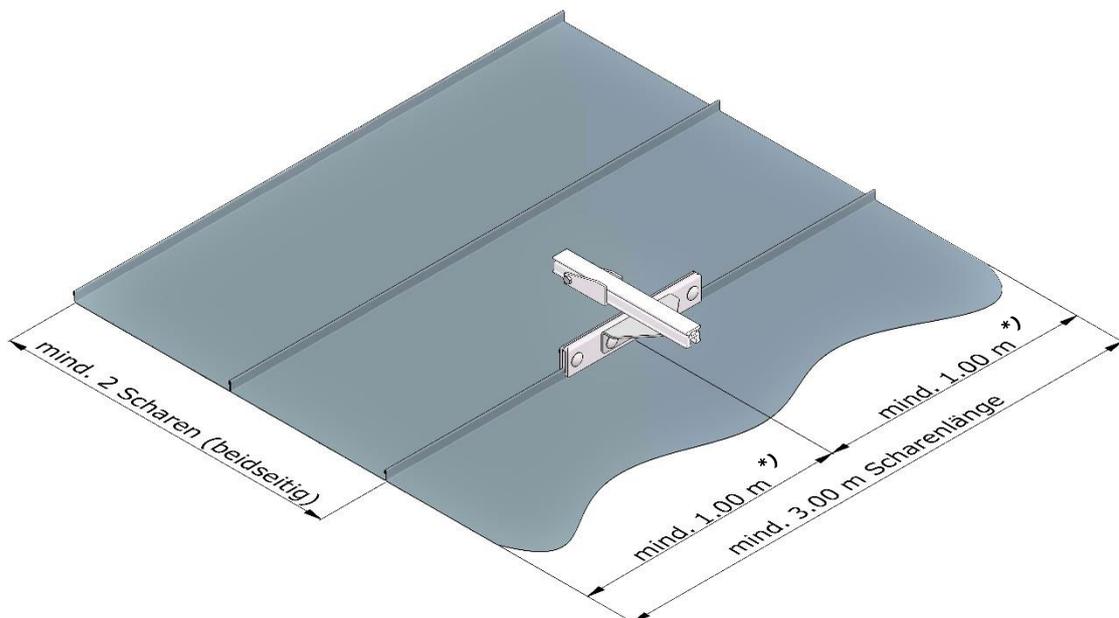

\*) When using the system in Germany, the information provided in the general building authority approval Z-14.9-808 must be observed. This limits, amongst others, the material of the standing seam profiles to titanium zinc and stainless steel. Furthermore, a bracket distance of  $\geq 2$  m to the end of the standing seam roof panel is specified.

**2e Bracket pitched roof (SD)**

**Installation on standard tile, plain tile or slate roofs**



Type and number of wood construction screws	3 pcs. HBS 8xL (A2)
Minimum rafter cross section [mm]	60 / 140
Minimum thread engagement length in the rafter [mm]	80

1. Position the rail bracket so that it fits into the roof covering assembly.
2. Align the bracket (using a guide line, for example) and install:

a) Bracket **SD-Z II** (tiled roof): see fig. 1

Fasten the bracket through the counter batten centred in the rafters using the three wood construction screws supplied.

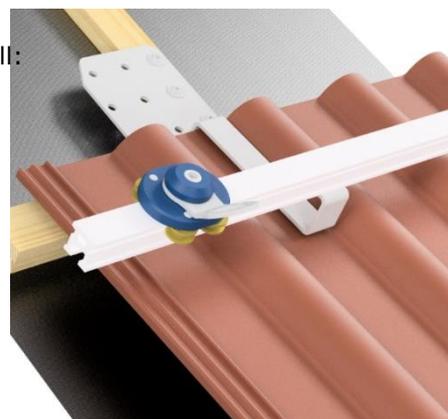


Fig. 1

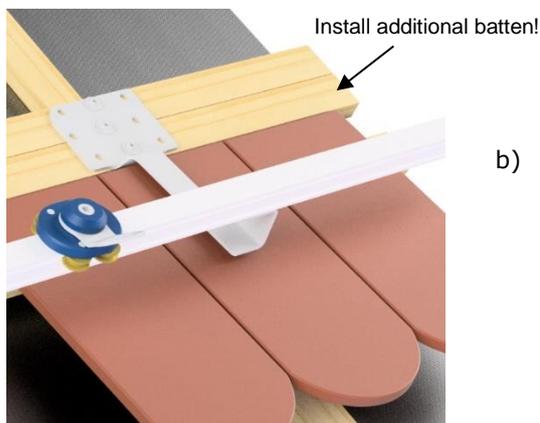


Fig. 2

b) Bracket **SD-B** (plain tile roof): see fig. 2

Push additional battens against the existing battens as a base for the bracket and fasten. Fasten the bracket through the supporting battens and counter battens in the centre of the rafters

c) Bracket **SD-S** (slate roof): see fig. 3

Fasten the bracket through the roof boarding in the centre of the rafters



Fig. 3

### 3 Fasten information sign A2




Observe separate instructions!

1. Insert the head of the hexagonal bolt into the groove of the rail profile.
2. Fit the information sign with lock washer and nut and apply a torque of 32 Nm.

### 4 Install the hinged outside anchor

Usually, the hinged outside anchor is already pre-assembled on the rail.


If a different position for the hinged outside anchor is required on site, proceed as follows:

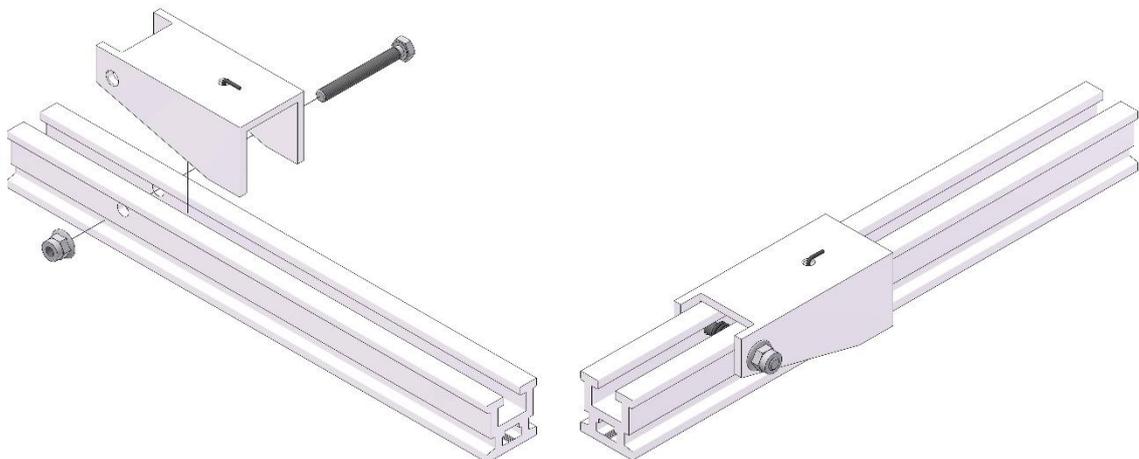

1. Position the flap flush on the rail as shown and drill a  $\varnothing 7$  mm passage hole through the entire rail profile (min. 30 mm edge distance to the end of the rail profile).
2. Insert the spring into the flap as shown in the figure and fasten the flap so that it swivels smoothly and closes automatically.

**5 Install the rail profile**

**Connect the bracket to the rail profile with a rectangular lock nut**

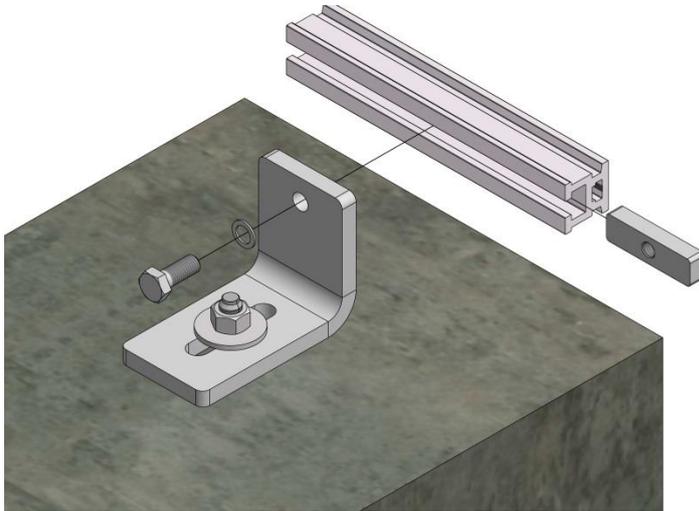


Sheet thickness of the bracket [mm]	required bolt / lock washer (included in delivery)
4	<b>M 10 x 20</b> + lock washer Shape VS with t = 1.8 mm
6	<b>M 10 x 22</b> + lock washer Shape VS with t = 1.8 mm
10	<b>M 10 x 25</b> +lock washer Shape S with t = 1 mm

The figure is an example for all bracket types

1. Insert the rectangular lock nut into the rail profile and push into position.
2. Fasten the supplied M 10 hexagon head screw with the lock washer through the bracket with a torque of 32 Nm. If necessary, use an open-ended torque wrench. (e.g. for pitched roof brackets or double standing seam brackets)

**6 Install butt connector (LA)**

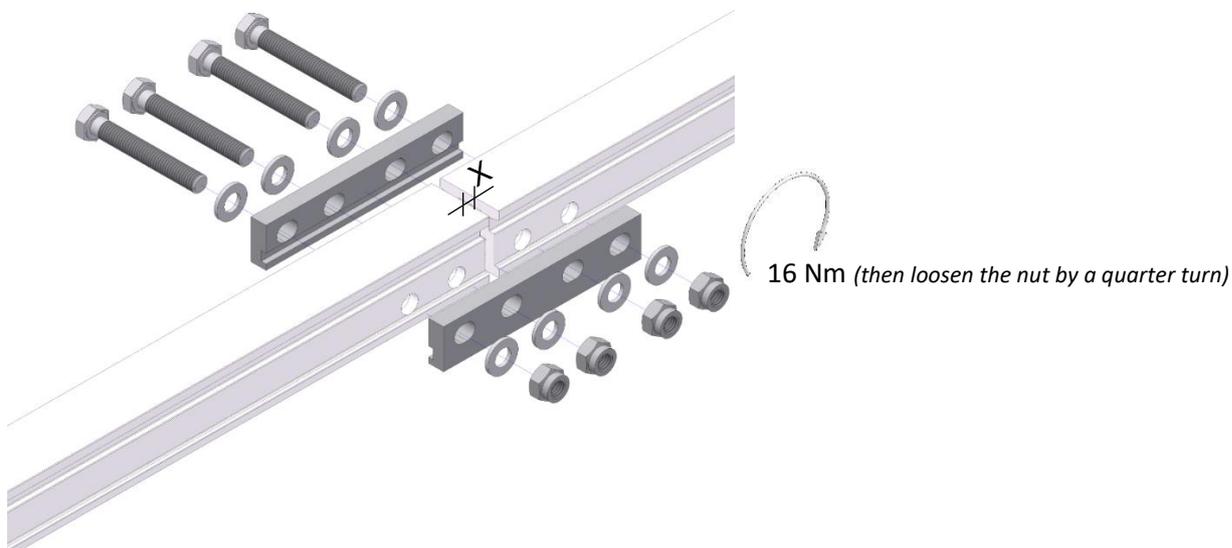


1. Connect and fasten the rail profiles to each other as shown in the figure and the following table

Temperature range [°C]	Gap width X [mm]
≤0	6
1 - 25	3
≥25	0

**The rail profiles are usually pre-drilled at the factory for fitting the butt connectors.**

*If a different position for the butt connector is required on site, proceed as follows:*

1. Single-sided installation of the butt connector on a pre-drilled rail section
2. Feed another rail section between the butt connectors and clamp the rail section that has not been pre-drilled between the butt connector plates (take the gap width X into account!).
3. Drill new  $\varnothing$  8 mm holes. Use the butt connector plates as a drilling template (centre of the slotted hole).
4. Fit the remaining 2 hexagonal bolts.

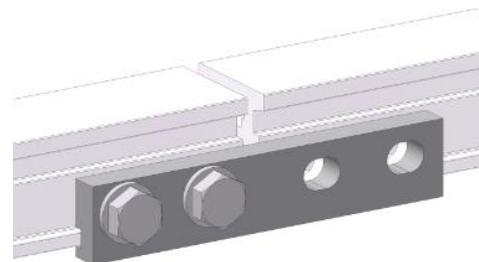




**9 Fill in inspection log card (upper part)**

<b>Kontrollkarte / Prüfbuch</b> <small>Anschlageneinrichtung für persönliche Schutzausrüstung gegen Absturz</small>		 <b>LUX-top®</b> <small>Hersteller: www.lux-top-absturzicherungen.de</small>
<b>Typ/Modell</b>	<b>LUX top® FSA 2010-H</b>	<b>NORM: DIN EN 795 Typ C + CEN/TS16415</b>
Baujahr		
Montagedatum		
Datum der ersten Inbetriebnahme		
Projekt- / Objektbezeichnung		
Adresse des Betreibers / Auftraggebers		

Regelmäßige Systemkontrolle, Überprüfung und Instandsetzung					
Datum	Grund der Bearbeitung (regelmäßige Überprüfung oder Instandsetzung)	Festgestellte Schäden + Mängel (Beschreibung / Maßnahmen usw.)	Zur sicheren Verwendung freigegeben (ja/nein)	Name + Unterschrift der Sachkundigen Person	Datum der nächsten Prüfung

STQUADRAT Fall Protection S.A. - **Ihr kompetenter Partner für Absturzicherungen** - [www.lux-top-absturzicherungen.de](http://www.lux-top-absturzicherungen.de) Version 01/2018

**10 Document handover to building operator or client**

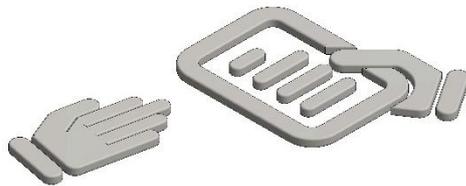

# LUX-top<sup>®</sup> FSA 2010-H

## STANDARDS

**LUX-top<sup>®</sup> FSA 2010-H** was tested and certified according to EN 795:2012 Type D + CEN/TS 16415:2017.

## SYMBOLS AND MARKINGS

A label must be attached and contain the following information:

- Type designation: **LUX-top<sup>®</sup> FSA 2010-H**
- Number of the relevant standard: **EN 795:2012 Type D + CEN/TS 16415:2017**
- Manufacturer's name or logo: 
- Manufacturer's serial number / year of manufacture: **XXXX/20XX**
- Max. permitted number of persons: **XX**
- Symbol indicating that the user instructions must be observed: 

The legibility of this product labelling must be inspected after installation and during the prescribed annual inspection!

If the labelling is no longer accessible after installation, it is recommended to attach an additional label close to the anchor device!

---

**Manufacturer: ST Quadrat S.A.**  
**11, rue Flaxweiler**  
**L-6776 Grevenmacher/Potaschberg**  
**Luxembourg**

---

Certification body involved in the type test:  
DEKRA Testing and Certification GmbH Certification body –  
Dinnendahlstraße 9, D – 44809 Bochum

## Object data

---

Building/Construction project

---

Street/Post code/Place

## Installation company

---

Company

---

Street/Post code/Place

---

Contact /Phone number

---

Installer

---

Date of completion

## Details of the anchor devices and substrate

---

Rail system - Type/version

---

Year of manufacture

---

Rail bracket

---

Fastening surface/construction material

---

Structural element dimensions

---

Fasteners, if applicable with torque specification

## Roof layout/sketch map (if necessary on additional sheet)

## Confirmation by the installation company

- 
- The LUX-top<sup>®</sup> anchor devices were installed by a qualified person according to the installation instructions and guidelines of ST QUADRAT Fall Protection S.A. and, when installed in Germany, in compliance with the general building authority approval Z-14.9-808.
- The fasteners used have been processed according to their manufacturers' guidelines (inspection of the substrate, proper cleaning of the drill holes, correct tightening torques + distances from edges, etc.)
- The installation and use instructions as well as the technical documentation have been handed over to the customer so that they can make them available to the user.
- 

---

(Place, date)

---

(Stamp, signature)

This certificate is to be handed over to the owner.

This list is provided for free download at [www.lux-top-absturzsuren.de](http://www.lux-top-absturzsuren.de).

# CHECKLIST

for annual inspection of LUX-top® anchor devices by a competent person

## Horizontal anchor device LUX-top® FSA 2010-H

Building/Construction project .....

Street/Post code/Place .....

Year of construction of the installation .....

Date of inspection: .....

Competent person: .....

### 1 Corrosion

Is there any visible corrosion on system components (profile rail, rail bracket, etc.)?  yes, on .....

no

Can a cause for the corrosion (e.g. chimney nearby) be determined?  yes, .....

no

Is the load-bearing capacity of the anchor device limited?  yes

no

Is the fastening visible?  yes

no

If yes, is the fastening complete and correct? (check tightening torque if necessary!)  yes

no

### 2 Contamination

Are the system components dirty (e.g. soiled by bird droppings, moss, algae)?  yes, by .....

no

Does the dirt impair its functionality?  yes, .....

no

Is it possible to prevent the contamination in the future?  yes, .....

no

### 3 Appearance

Are the rail components or rail brackets visibly deformed or distorted? (E.g. due to fall load)

yes, .....

no

*On inclined roofs:*

Is there any identifiable damage due to snow loads?

yes, .....

no

Is there any identifiable damage due to lightning strikes?

yes

no

Are there any signs of external intervention or tampering?

yes, .....

no

Are all of the rail system components still present? (end stops, butt connectors, rail brackets)

yes

no

Are the rail system fasteners present and tightened?

yes

no

Is the information sign present and legible?

yes

no

### 4 Slider

Is there any visible corrosion on slider components?

yes

no

Can a cause for the corrosion (e.g. chimney nearby) be determined?

yes

no

Are the slider components visibly deformed? (E.g. due to fall load)

yes

no

Are there any signs of external intervention or tampering?

yes

no

Are the bolted connections of the track roller shafts and the suspension eye present and are the locking notches lined up?

yes

no

Are there signs of increased wear on the slider?  
(e.g. on the track rollers or the suspension eye)

yes

no

Do the track rollers run smoothly and turn freely?

yes

no

**5 Documentation**

Are the Installation and User Instructions present?

yes

no

Is the installation documentation (if applicable with photos) available?

yes


no, .....

Is the inspection log card / log book present and correctly filled out?

yes

no, .....

**6 Evaluation**

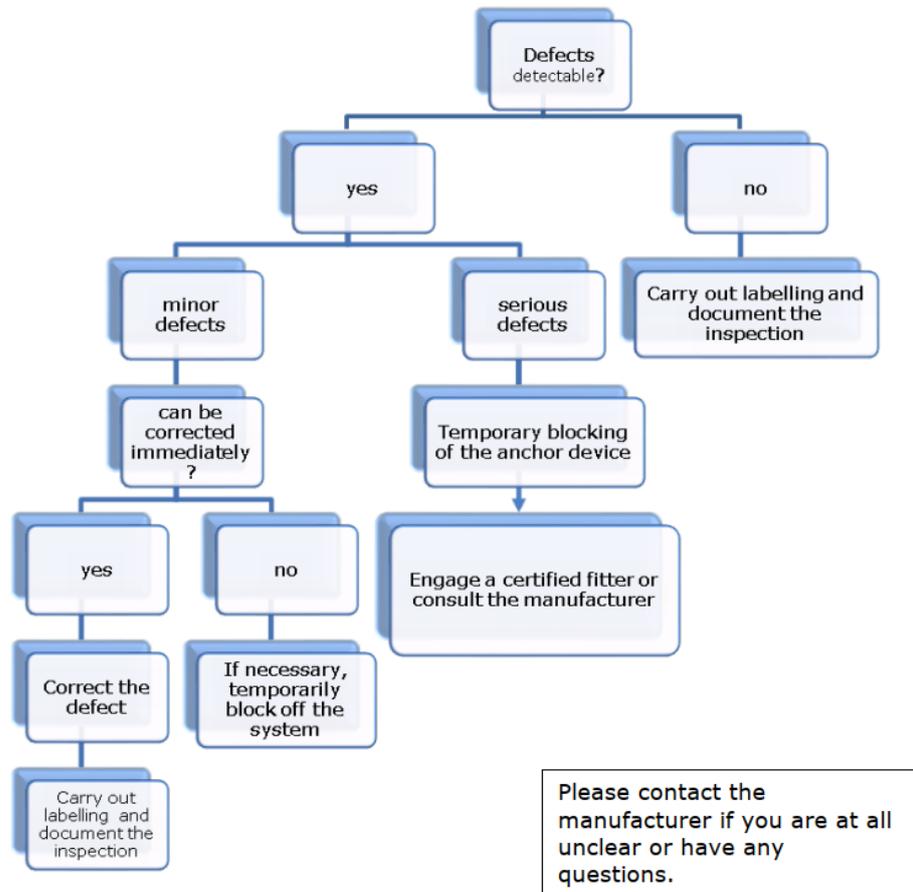

## 7 Summary

The inspected system is free from defects and can continue to be used without restriction.

yes

no, the following defects must be corrected:

.....  
.....  
.....  
.....

---

## 8 Confirmation of the Competent Person

**Name** .....

**First name** .....

**Company** .....

**Street** .....

**Post code, Place** .....

\_\_\_\_\_  
(Place, date)

\_\_\_\_\_  
(Stamp, signature)

# Inspection Log Card / Log Book

Anchor device for personal fall protection equipment



**LUX-top®**

Manufacturer: [www.lux-top.com](http://www.lux-top.com)

<b>Type/Model</b>	<b>LUX top® FSA 2010-H</b>	<b>STANDARD: EN 795 Type D + CEN/TS 16415</b>
Year of manufacture		
Installation date		
Commissioning date		
Project / property name		
Address of the owner (user) / customer		

<b>Regular system check, inspection and repair</b>					
Date	Reason for processing (regular inspection or repair)	Identified damage + defects (description/action taken, etc.)	Released for safe use (yes/no)	Name + signature of the competent person	Date of the next inspection

Sketches, information, notes: